




Fuse Replacement Bar

Replaces Clip Mounted Fuses

Descriptive
Bulletin
3903
Page 1 2015

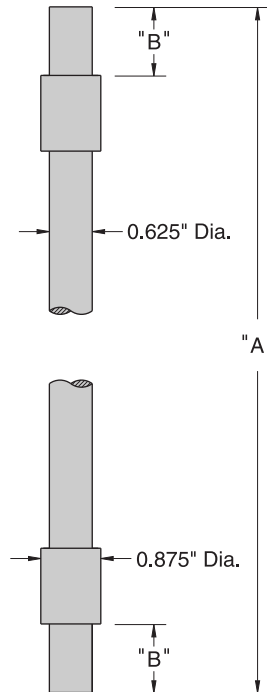

The Elliott Fuse Replacement Bar can be installed in place of a clip mount type current-limiting fuse (that has 0.625-inch diameter ferrels) when a non-fused connection is required. The fuse replacement bar is selected based on fuse mounting codes listed below.

CAUTION: Fuse Replacement Bars should be used only after you have determined that the use of this device is acceptable in accordance with your company's engineering, operating and safety practices.

Catalog Number	Fuse Mounting Code	"A"	"B"	Weight Lbs. (kg)
3903-CBCM4	4	10.0"	1.0"	1.2 (0.5)
3903-CBCM5	5	14.3125"	1.0"	1.6 (0.7)
3903-CBCM6	6	17.125"	1.0"	1.9 (0.9)
3903-CBCM9	9	27.375"	1.1875"	3.0 (1.4)
3903-CBCM10	10	35.375"	1.1875"	3.7 (1.7)



Fuse Replacement Bar

Replaces Clip Mounted Fuses

Descriptive
Bulletin
3903
Page 2 2015

If you do not find the design
you need

PLEASE CONTACT

our REPRESENTATIVE or the FACTORY